

No.8 Anchor Bolt [No Charge]

Submit to

HIROMEYA CO., LTD. (Mr. Igata/Mr. Masui)

E-mail: ipf-en@hiromeya.co.jp FAX: +81-3-3563-0023 TEL: +81-3-3563-0010

Exhibitor				Date:
Section / Department				
Contact: Mr./Ms.			Booth No.	
TEL		E-mail		

We will use anchor bolts.	☐ Yes	→ Fill in the blanks below.	☐ No
---------------------------	------------------------------	-----------------------------	-----------------------------

Please fill in the floor construction plan and the constructor's name. The exhibitor must observe all the rules and regulations and is responsible for restoring the hall space to its original state.


*If the number of anchor bolts you actually embed differs from the number you applied for, be sure to report the correction during the move-in period. Even if you embed fewer than the number you applied for, you will be charged the embedding charge for the full number applied for unless you report the difference.

Number of Hall-in Anchors to Be Embedded	pieces	Diameter: __ mmφ	Number of anchors: __ × @¥1,650
Work will be carried out on	November ____ to ____,		● Please pay an embedding fee (floor recovery cooperation fee) of ¥1,650 per anchor. ● If the floor is not fully recovered to its original state after the exhibition is concluded, a recovery fee of ¥11,000 per anchor applies.
Restoration work will be carried out on	☐ Sat, Dec. 5 ☐ Sun, Dec. 6		
Restoration Method	Cutting by sander only. (Driving into the floor with hammer and cutting using gas burners are not permitted.)		
Attached Document	Booth design drawings (indicating the desired positions for embedding hall-in anchors): 2 copies		
Contractor	Company Name: _____ Address: _____		Contact Person: _____ TEL: _____
Send an invoice to	☐ 1. Exhibitor ☐ 2. Contractor		

Cautions on Embedding Hall-in Anchors

- The floor structure is shown below. The length of the hall-in anchors embedded in the concrete must be 80 mm or less, and the thickness must be 20 mm or less.
- Hall-in anchors may not be embedded on the lids of the floor pit, within 20 cm of the pit edges, or inside the pit.
- The use of chemical anchors is prohibited.

<Cross-section drawing>

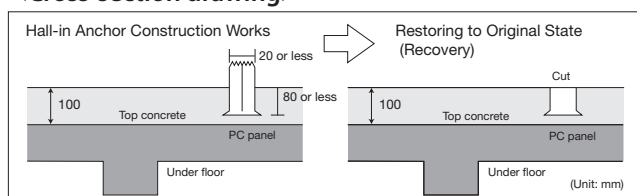

<Floor Plan Drawing>

